

Canadas #1 Professional Brand

# **FEATHERLITE**

## **FULL LINE CATALOG**



# HOW TO SELECT A LADDER

## A GUIDE

### 1 Select a Type



#### STEP LADDER

The most popular style of ladder. Used from medium to low heights. Utilize pail shelves and tops to hold tools for the job.

#### SPECIALTY LADDER

Multi purpose ladder for use in many scenarios, as a step or extension ladder on multiple surfaces.

#### EXTENSION LADDER

The most versatile style of ladder, found in a variety of sizes. Most commonly used for higher elevations.

### 2 Select a Height

STEP LADDERS		
LADDER SIZE	APPROX. HIGHEST STANDING LEVEL	MAXIMUM REACH <sup>^</sup>
4'	1' 11"	8' 6"
5'	2' 10"	9' 5"
6'	3' 9"	10' 4"
7'	4' 9"	11' 4"
8'	5' 8"	12' 3"
10'	7' 7"	14' 2"
12'	9' 6"	16' 1"
14'	11' 5"	18'
16'	13' 4"	19' 11"
18'	15' 3"	21' 10"
20'	17' 2"	23' 9"

EXTENSION LADDERS				
LADDER SIZE	MAXIMUM EXTENDED LENGTH	MAX. REACH <sup>*</sup>	WORKING RANGE TO TOP SUPPORT <sup>*</sup>	MAXIMUM ACCESSIBLE ROOF HEIGHT RANGE <sup>*</sup>
16'	13'	15' 11"	7 ½' - 12 ½'	4 ½'-9 ½'
20'	17'	19' 1"	9 ½' - 16 ½'	6 ½'-13 ½'
24'	21'	23' 8"	11 ½' - 20'	8 ½'-17'
28'	25'	27' 7"	13 ½' - 24'	10 ½'-21'
32'	29'	31' 5"	15 ½' - 28'	12 ½'-25'
36'	32'	34' 4"	17 ½' - 31'	14'-28'
40'	35'	37' 3"	19' - 33 ½'	16'-30 ½'
44'	39'	41' 1"	21' - 37 ½'	18'-34 ½'
48'	43'	45'	23' - 41 ½'	20'-38 ½'
60'(1)	48'	49' 10"	23' - 46 ½'	20'-43 ½'

<sup>^</sup>Assumes 5' 7" person with 12" vertical reach | <sup>\*</sup>When set up at the proper 75 1/2° angle | <sup>\*\*</sup>Three-section extension ladder

### 3 Select a Load Capacity




**TYPE IAA:** Professional use. Extra heavy duty. Capable of supporting 375 lbs.  
**USES:** MRO and industrial construction.



**TYPE IA:** Professional use. Extra heavy duty. Capable of supporting 300 lbs.  
**USES:** Roofing, building maintenance, contracting and industrial construction.



**TYPE I:** Industrial use. Heavy duty. Capable of supporting 250 lbs.  
**USES:** Building maintenance, general contracting and sheet rock.



**TYPE II:** Commercial use. Medium duty. Capable of supporting 225 lbs.  
**USES:** Light commercial and general repair, painting and cleaning.



**TYPE III:** Household use. Light duty. Capable of supporting 200 lbs.  
**USES:** Light cleaning and painting.

### 4 Select a Ladder Material



**DO NOT USE ALUMINUM LADDERS NEAR ELECTRICITY**

#### ALUMINUM

- › Lightweight
- › Long-lasting construction
- › Resists corrosion
- › Ideal for painting, roofing and siding



**FIBERGLASS LADDERS ARE REQUIRED FOR WORKING AROUND ELECTRICITY**


#### FIBERGLASS

- › Non-conductive when clean and dry
- › Strong and durable
- › Weather-resistant
- › Great for heavy-duty construction

**AT FEATHERLITE**, all of our products are designed and constructed to meet or exceed applicable standards and requirements of Canadian Standards Association (CSA), and the American National Standards Institute (ANSI). Please read the information on this page before using our products. Your safety is important to us.

## HOW TO SAFELY USE OUR LADDERS

Louisville Ladder Corp. manufactures products in compliance with the applicable **CANADIAN NATIONAL STANDARDS (CSA)** and American National Standards Institute (ANSI), safety codes.

CSA is a developer of safety standards and a provider of product testing and certification services for portable ladders. The CSA certification mark  indicates the ladder has been tested and certified in conformity with the Z11-18 Portable Ladder standard. Certification is an ongoing process that involves follow up factory inspections and testing. Ladders displaying the CSA Certification mark provides our customers increased assurance of product quality and safety.

ANSI is a developer of safety standards for a wide variety of consumer and industrial products. Listed below are the individual ANSI ladder standards based on material or type of climbing product.


SCAFFOLDS, PLANKS AND STAGES: **ANSI A10.8**  
WOOD LADDERS: **ANSI A14.1**  
ACCESSORIES: **ANSI A14.8**

METAL LADDERS: **ANSI A14.2**  
FIBERGLASS LADDERS: **ANSI A14.5**  
STEEL LADDERS: **ANSI A14.7**  
ATTIC LADDERS: **ANSI A14.9**

Both CSA and ANSI have established a Duty Rating which identifies the use for which a portable ladder is intended and the conditions under which the ladder can be used safely. An extensive series of tests and design requirements determines which Duty Rating label a ladder may receive. The total load supported includes the combined weight of the user, clothing, tools and any materials on the ladder. However, ladders must be used properly to support the intended load. See section "Select a Load Capacity" on previous page for more information on CSA and ANSI Duty Ratings.



**SAFETY IS EVERYONE'S RESPONSIBILITY.** Even a rigidly constructed ladder can be involved in an accident if the proper cautions are not taken in its use. Critical factors in safe use include reading all instructions and labels accompanying the ladder.



### PROPER SELECTION

Select ladder of proper duty rating to support combined weight of user and materials. Ladders are available with duty ratings of 200, 225, 250, 300 and 375 lbs. Select ladder of proper length to safely reach desired height.

### INSPECTION BEFORE EACH USE

- › Inspect thoroughly for missing or damaged components. Never use a damaged ladder and never make temporary repairs.
- › Inspect thoroughly for loose fasteners. Make sure all working parts are in good working order (lubricate if necessary).
- › Clean ladder of all foreign material (wet paint, mud, snow, grease, oil, etc).
- › Destroy ladder if damaged, worn, or exposed to fire or chemicals

### CONSIDER BEFORE EACH USE

- › Metal ladders conduct electricity. Keep away from electrical circuits.
- › Consult manufacturer for use in chemical or other corrosive environments.
- › Use ladder only as outlined in instructions. Ladders are designed for one person only unless otherwise noted (i.e. twin front ladders). Do not overload.
- › Do not use in high winds or during storm
- › Do not use if in poor health, if taking any drugs or alcoholic beverages, or if physically handicapped
- › Keep shoes clean. Leather soles should not be worn.
- › Never leave ladder set up and unattended
- › Pay close attention to what you are doing

### STEP LADDERS – PROPER SETUP AND USE

- › Use help in setting up ladder, if possible
- › Make sure ladder is fully open and spreaders locked
- › Set all feet on firm, level surface. Do not place on unstable, loose or slippery surfaces. Place ladder where access is not obstructed. Do not place in front of unlocked doors. Ladders are not intended to be used on scaffolds.
- › Secure ladder, where possible, from excessive movement

- › Make sure spreaders are locked and ladder is stable before climbing
- › Climb only front side of ladder. Face ladder when climbing up or down. Maintain a firm grip. Use both hands in climbing.
- › Keep body centered between side rails. Do not overreach. Get down and move ladder as needed.
- › Do not climb, stand, or sit above second step from top. Do not climb, stand, or sit on spreader braces, ladder top, or pail shelf.
- › Do not straddle front and back. Do not climb from one ladder onto another.
- › Avoid pushing or pulling off to side of ladder. Do not "walk" or "shift" ladder while on it.

For additional information see ANSI A14.1–Wood; A14.2–Aluminum; A14.5–Fiberglass. Twin front (mechanic) ladders and extension trestle ladders may be climbed from either side.

### SINGLE & EXTENSION LADDERS – PROPER SETUP AND USE

- › Use help in setting up ladder, if possible
- › Set base of ladder on firm, level surface. Ladder leveling devices are available for use on uneven ground. Place ladder where access is not obstructed.
- › Do not place on unstable, loose, or slippery surfaces. Do not place in front of unlocked doors. Ladders are not intended to be used on scaffolds.
- › Secure base section before raising ladder to upright position. Do not raise or lower with fly section extended.
- › Extend fly section and engage runglocks. Make sure rope does not create a tripping hazard or interfere with activity near ladder.
- › Recommend tying bottom fly rung to adjacent base rung
- › Extend and retract fly section only from ground and when no one is on ladder.
- › Do not overextend. A minimum overlap of sections is required as follows:
  - ladder size up to and including 32'–3' overlap
  - over 32' up to and including 36'–4' overlap
  - over 36' up to and including 48'–5' overlap
  - sizes over 48'–6' overlap

- › Position ladder against upper support surface. Make sure ladder does not lean to side. Ladder must make a 75 1/2° angle with the ground.
- › To establish if ladder is at proper angle – Determine the distance along the rail between the top and bottom support points of the ladder. Divide this distance by 4. The result will be the horizontal distance between the top and bottom support points.
- › When using ladder for access to roof, extend top 3 feet above roof edge. Tie or secure top from movement.
- › Make sure top and bottom ends of ladder are firmly supported
- › Check that top and bottom of ladder are properly supported. Make sure runglocks are engaged before climbing.
- › Face ladder when climbing up or down. Maintain a firm grip.
- › Use both hands in climbing
- › Keep body centered between side rails. Do not overreach. Get down and move ladder as needed.
- › Do not climb above top support point. Do not climb from one ladder to another.
- › Do not straddle or sit on rungs
- › Avoid pushing or pulling off to side of ladder. Do not "walk" or "shift" ladder while on it.

### PROPER CARE AND STORAGE

- › Hang ladder on racks at intervals of 6' for support
- › Never store materials on ladder
- › Never drop or apply an impact load to ladder
- › Securely support ladder in transit
- › Never paint a wood ladder. Treat with wood preservative.
- › Protect wood ladder from exposure to the elements, but allow good ventilation. Keep away from heat and moisture.

**FIBERGLASS STEP**

**01** 6800-AA • 375  
6600-AA • 375  
6400 • 300

**02** 6600 • 300  
6900 • 300  
6300 • 250

**03** 5800 • 225

**FIBERGLASS PLATFORM**

**03** 6500-AA • 375  
6500 • 300

**FIBERGLASS STRAIGHT**

**04** 6100 • 375  
5600 • 375  
5600D • 375  
5300 • 375

**FIBERGLASS EXTENSION**

**05** 9200D • 375  
6200 • 375  
6200D • 375  
6900 • 300

**ALUMINUM STEP**

**06** 3400 • 300  
2400 • 225  
3700 • N/A

**ALUMINUM STRAIGHT**

**07** 4100 • 300  
3100D • 300

**ALUMINUM EXTENSION**

**08** 4200D • 300  
3200D • 300  
2200 • 225

**SPECIALTY**

**09** 2700 • 300  
FXS6900 • 300

**ACCESSORIES**

**10**

**LOCATIONS**

**11**



Wrap Around Rail



Heavy Duty Gusset



Heavy Duty Boot



6800-AA


MODEL	LADDER SIZE	OPEN HEIGHT	HIGHEST STANDING LEVEL	BASE WIDTH	BASE DEPTH	APPROX. WEIGHT LBS	MAX. REACH
6804-AA	4'	45 4/7"	23"	21 1/4"	29 7/8"	15	8' 6"
6806-AA	6'	68 4/9"	46"	24 1/4"	41 4/5"	22	10' 5"
6808-AA	8'	91 1/4"	68"	27 1/4"	53 4/9"	31	12' 3"
6810-AA	10'	114"	91"	30 1/4"	65 1/3"	42	14' 2"
6812-AA	12'	136 7/8"	114"	33 1/4"	77 1/8"	52	16' 1"




TWIN STEP LADDER



Metal Top



Wrap Around Rail



Heavy Duty Boot




6600-AA

MODEL	LADDER SIZE	OPEN HEIGHT	HIGHEST STANDING LEVEL	BASE WIDTH	BASE DEPTH	APPROX. WEIGHT LBS	MAX. REACH
6604-AA	4'	45 1/4"	1' 11"	21 1/4"	37 7/8"	22	8' 6"
6606-AA	6'	68 1/8"	3' 10"	24 1/4"	52 3/4"	31	10' 5"
6608-AA	8'	90 15/16"	5' 8"	27 1/4"	67 1/2"	41	12' 3"
6610-AA	10'	113 3/4"	7' 7"	30 1/4"	82 3/8"	60	14' 2"
6612-AA	12'	136 9/16"	9' 6"	33 1/4"	97 1/4"	73	16' 1"



Top with Tool Slots



Wrap Around Rail



Heavy Duty Boot



6400

MODEL	LADDER SIZE	OPEN HEIGHT	HIGHEST STANDING LEVEL	BASE WIDTH	BASE DEPTH	APPROX. WEIGHT LBS	MAX. REACH
*6402	2'	24"	1' 10"	17"	18 1/8"	10	8' 5"
6404	4'	45 4/7"	1' 11"	21 1/4"	29 7/8"	14	8' 6"
6406	6'	68 4/9"	3' 10"	24 1/4"	41 4/5"	21	10' 5"
6408	8'	91 1/4"	5' 8"	27 1/4"	53 4/9"	28	12' 3"
6410	10'	114 1/16"	7' 7"	30 1/4"	65 1/3"	40	14' 2"
6412	12'	136 7/8"	9' 6"	33 1/4"	77 1/8"	50	16' 1"

\*6402 is a step stool





TWIN STEP LADDER



Aluminum Top



Wrap Around Rail




Heavy Duty Boot




	MODEL	LADDER SIZE	OPEN HEIGHT	HIGHEST STANDING LEVEL	BASE WIDTH	BASE DEPTH	APPROX. WEIGHT LBS	MAX. REACH
0600	6603	3'	33 7/8"	1' 0"	18 1/4"	30 1/2"	17	7' 7"
	6604	4'	45 1/4"	1' 11"	21 1/4"	37 7/8"	21	8' 6"
	6606	6'	68 1/8"	3' 10"	24 1/4"	52 3/4"	29	10' 5"
	6608	8'	90 7/8"	5' 8"	27 1/4"	67 1/2"	38	12' 3"
	6610	10'	113 3/4"	7' 7"	30 1/4"	82 3/8"	56	14' 2"



Pro Top™



Inside Spreader Brace



Heavy Duty Boot



	MODEL	LADDER SIZE	OPEN HEIGHT	HIGHEST STANDING LEVEL	BASE WIDTH	BASE DEPTH	APPROX. WEIGHT LBS	MAX. REACH
0069	6904	4'	45 4/7"	1' 11"	21 1/4"	29 7/8"	14	8' 6"
	6906	6'	68 4/9"	3' 10"	24 1/4"	41 4/5"	21	10' 5"
	6908	8'	91 1/4"	5' 8"	27 1/4"	53 4/9"	28	12' 3"
	6910	10'	114"	7' 7"	30 1/4"	65 1/3"	40	14' 2"
	6912	12'	136 7/8"	9' 6"	33 1/4"	77 1/8"	50	16' 1"



Molded Top



Slip Resistant Tread




Slip Resistant Shoe



	MODEL	LADDER SIZE	OPEN HEIGHT	HIGHEST STANDING LEVEL	BASE WIDTH	BASE DEPTH	APPROX. WEIGHT LBS	MAX. REACH
0030	6304	4'	45 10/16"	1' 11"	18 3/4"	28 5/8"	12	8' 6"
	6305	5'	57"	2' 10"	20 1/8"	34 1/2"	15	9' 5"
	6306	6'	68 1/2"	3' 10"	21 7/8"	40 3/8"	17	10' 5"



Molded Top



Pail Shelf



Slip Resistant Shoe



5800

MODEL	LADDER SIZE	OPEN HEIGHT	HIGHEST STANDING LEVEL	BASE WIDTH	BASE DEPTH	APPROX. WEIGHT LBS	MAX. REACH
5804	4'	47"	1' 11"	18 7/8"	28"	11	8' 6"
5805	5'	57"	2' 10"	20 1/2"	33 1/2"	13	9' 5"
5806	6'	68 1/2"	3' 10"	22"	39 3/4"	15	10' 5"




Wide Platform



Wrap Around Rail



Heavy Duty Boot



6500-AA

MODEL	LADDER SIZE	OPEN HEIGHT	HIGHEST STANDING LEVEL	BASE WIDTH	BASE DEPTH	APPROX. WEIGHT LBS	MAX. REACH
6504-AA	4'	44 9/16"	1' 11"	21 1/4"	30"	17	8' 6"
6505-AA	5'	56"	2' 10"	22 11/16"	36"	22	9' 5"
6506-AA	6'	67 7/16"	3' 10"	24 2/16"	42 5/8"	26	10' 5"
6508-AA	8'	78 13/16"	5' 8"	27 1/16"	55 3/8"	33	12' 3"
6510-AA	10'	90 1/4"	7' 7"	30"	68"	45	14' 2"
6512-AA	12'	113 3/16"	9' 6"	33 3/16"	80 6/8"	54	16'



Top Rail Guard



Wrap Around Rail



Heavy Duty Boot




6500

MODEL	LADDER SIZE	OPEN HEIGHT	HIGHEST STANDING LEVEL	BASE WIDTH	BASE DEPTH	APPROX. WEIGHT LBS	MAX. REACH
6504	4'	44 9/16"	1' 11"	21 1/4"	30"	17	8' 6"
6505	5'	56"	2' 10"	22 11/16"	36"	22	9' 3"
6506	6'	67 7/16"	3' 10"	24 1/8"	42 5/8"	26	10' 5"
6508	8'	78 13/16"	5' 8"	27 1/16"	55 3/8"	33	12' 3"
6510	10'	90 1/4"	7' 7"	30"	68"	45	14' 2"
6512	12'	113 3/16"	9' 6"	33 3/16"	80 3/4"	54	16' 1"





Non-Marring End Caps



Riveted Rung to Rail



1 Piece Foot Assembly




6100

MODEL	LADDER SIZE	OUTSIDE WIDTH	INSIDE WIDTH	APPROX. WEIGHT (LBS)	MAX. REACH
6108	8'	17 7/16"	15 1/16"	19	11' 5"
6110	10'	17 7/16"	15 1/16"	23	13' 4"
6112	12'	17 7/16"	15 1/16"	26	15' 3"
6114	14'	17 7/16"	15 1/16"	30	17' 2"
6116	16'	17 7/16"	15 1/16"	34	19' 0"



Non-Marring End Caps



Riveted Rung to Rail



Heavy Duty Foot




5600D


MODEL	LADDER SIZE	OUTSIDE WIDTH	INSIDE WIDTH	APPROX. WEIGHT (LBS)	MAX. REACH
5608D	8'	17 7/16"	15 1/16"	19	11' 2"
5610D	10'	17 7/16"	15 1/16"	22	13' 1"
5612D	12'	17 7/16"	15 1/16"	26	15' 0"
5614D	14'	17 7/16"	15 1/16"	30	16' 11"
5616D	16'	17 7/16"	15 1/16"	34	18' 10"



Narrow Inside width



Rail Protector



Slip Resistant Shoe



5300

MODEL	LADDER SIZE	OUTSIDE WIDTH	INSIDE WIDTH	APPROX. WEIGHT (LBS)	MAX. REACH
5308	8'	12	9 5/8"	18	11' 4"
5310	10'	12	9 5/8"	22	13' 3"
5312	12'	12	9 5/8"	27	15' 2"
5314	14'	12	9 5/8"	29	17' 0"
5316*	16'	12	9 5/8"	34	18' 11"

Complies with ANSI / OSHA (CSA not applicable).  
\*5316 300LBS rated.






Riveted Rung to Rail



Heavy Duty Foot



Raise From Rear




92000	BASE SECTION				FLY SECTION		APPROX. WEIGHT LBS	MAX. REACH	
	MODEL	LADDER SIZE	MAX. OPEN LENGTH	OUTSIDE WIDTH	INSIDE WIDTH	OUTSIDE WIDTH			INSIDE WIDTH
	9216D	16'	13"	17 7/16"	15 1/16"	16 7/16"	14 1/16"	39	15' 11"
	9220D	20'	17"	17 7/16"	15 1/16"	16 7/16"	14 1/16"	46	19' 10"
	9224D	24'	21"	17 7/16"	15 1/16"	16 7/16"	14 1/16"	54	23' 8"
	9228D	28'	25"	17 7/16"	15 1/16"	16 7/16"	14 1/16"	62	27' 7"
	9232D	32'	29"	17 7/16"	15 1/16"	16 7/16"	14 1/16"	70	31' 5"
	*9240D	40'	35"	17 7/16"	15 1/16"	16 7/16"	14 1/16"	117	37' 3"


\*Grade IA orange fiberglass



Riveted Rung to Rail




Raise from Front



1 Piece Foot Assembly




6200 / 62000	BASE SECTION				FLY SECTION		APPROX. WEIGHT LBS	MAX. REACH	
	MODEL	LADDER SIZE	MAX. OPEN LENGTH	OUTSIDE WIDTH	INSIDE WIDTH	OUTSIDE WIDTH			INSIDE WIDTH
	6216	16'	13"	17 7/16"	15 1/16"	16 7/16"	14 1/16"	40	16' 2"
	6220	20'	17"	17 7/16"	15 1/16"	16 7/16"	14 1/16"	47	20' 1"
	6224	24'	21"	17 7/16"	15 1/16"	16 7/16"	14 1/16"	55	23' 11"
	6228	28'	25"	17 7/16"	15 1/16"	16 7/16"	14 1/16"	62	27' 10"
	6232	32'	29"	17 7/16"	15 1/16"	16 7/16"	14 1/16"	69	31' 8"
	6216D	16'	13"	17 7/16"	15 1/16"	16 7/16"	14 1/16"	41	16' 2"
	6220D	20'	17"	17 7/16"	15 1/16"	16 7/16"	14 1/16"	49	20' 1"
	6224D	24'	21"	17 7/16"	15 1/16"	16 7/16"	14 1/16"	57	23' 11"
	6228D	28'	25"	17 7/16"	15 1/16"	16 7/16"	14 1/16"	64	27' 10"
	6232D	32'	29"	17 7/16"	15 1/16"	16 7/16"	14 1/16"	72	31' 8"



D Rung



Max Lock



Swivel Foot



6900	BASE SECTION				FLY SECTION		APPROX. WEIGHT LBS	MAX. REACH	
	MODEL	LADDER SIZE	MAX. OPEN LENGTH	OUTSIDE WIDTH	INSIDE WIDTH	OUTSIDE WIDTH			INSIDE WIDTH
	6916	16'	13"	17 1/16"	14 11/16"	16 1/16"	13 11/16"	31	15' 11"
	6920	20'	17"	17 1/16"	14 11/16"	16 1/16"	13 11/16"	42	19' 10"
	6924	24'	21"	17 1/16"	14 11/16"	16 1/16"	13 11/16"	51	23' 8"
	6928	28'	25"	17 1/16"	14 11/16"	16 1/16"	13 11/16"	60	27' 7"
	6932	32'	29"	17 1/16"	14 11/16"	16 1/16"	13 11/16"	67	31' 5"

**MAX LOCK™**

THE STRONGEST, TOUGHEST, LIGHTEST RUNG LOCK EVER.



# ALUMINUM STEP



ProTop™



Pail Shelf



Heavy Duty Boot



3400	MODEL	LADDER SIZE	OPEN HEIGHT	HIGHEST STANDING LEVEL	BASE WIDTH	BASE DEPTH	APPROX. WEIGHT LBS	MAX. REACH
	*3402	2'	22 13/16"	22 13/16"	16 7/16"	17 1/4"	5	8' 5"
3404	4'	45 3/4"	22 13/16"	18 1/2"	30"	11	8' 6"	
3406	6'	68 1/2"	45 5/8"	21 9/16"	42 3/4"	16	10' 5"	
3408	8'	91 5/16"	68 1/2"	24 9/16"	55 1/2"	21	12' 3"	
3410	10'	114 1/8"	91 5/16"	27 9/16"	68 1/4"	27	14' 2"	
3412	12'	136 15/16"	114 1/8"	31 7/8"	77 3/4"	38	16' 1"	

\*3402 is a step stool.



Top with Tool Slots



Pail Shelf




Slip Resistant Shoe



2400	MODEL	LADDER SIZE	OPEN HEIGHT	HIGHEST STANDING LEVEL	BASE WIDTH	BASE DEPTH	APPROX. WEIGHT LBS	MAX. REACH
	2404	4'	45 5/8"	23"	17 3/4"	27 4/5"	8	8' 6"
2406	6'	68"	46"	20 3/4"	41 1/8"	11	10' 5"	
2408	8'	91 5/16"	68"	23 5/16"	5 5/8"	14	12' 3"	
2410	10'	114 1/8"	91"	26 1/16"	64 1/4"	18	14' 2"	



Wide Design



Slip Resistant Shoe




Combine Sizes to Create a Plank



3700	MODEL	LADDER SIZE	OPEN HEIGHT	BASE WIDTH	BASE DEPTH	APPROX. WEIGHT LBS	MAX. REACH
	3702	2'	22 4/16"	31 15/16"	23 8/16"	10	N/A
3703	3'	33 8/16"	33 5/16"	31 8/16"	14	N/A	
3704	4'	44 12/16"	34 11/16"	39 8/16"	19	N/A	



Box Section Design



Aluminum Round Rung



Swivel Shoe



4100	MODEL	LADDER SIZE	OUTSIDE WIDTH	INSIDE WIDTH	APPROX. WEIGHT (LBS)	MAX. REACH
	4108	8'	13 3/4"	12 7/8"	13	11' 2"
4110	10'	13 3/4"	12 7/8"	15	13' 1"	
4112	12'	13 3/4"	12 7/8"	19	15' 0"	
4114	14'	13 3/4"	12 7/8"	22	16' 11"	
4116	16'	13 3/4"	12 7/8"	25	18' 10"	
4118	18'	13 3/4"	12 7/8"	28	20' 8"	
4120	20'	13 3/4"	12 7/8"	31	22' 7"	
4124	24'	13 3/4"	12 7/8"	44	26' 5"	



Aluminum D Rung



Non-Marring End Cap



Slip Resistant Shoe




3100D	MODEL	LADDER SIZE	OUTSIDE WIDTH	INSIDE WIDTH	APPROX. WEIGHT (LBS)	MAX. REACH
	3108D	8'	16 1/8"	15 3/16"	14	11' 2"
3110D	10'	16 1/8"	15 3/16"	17	13' 1"	
3112D	12'	16 1/8"	15 3/16"	20	15' 0"	
3114D	14'	16 1/8"	15 3/16"	26	16' 11"	
3116D	16'	17 1/8"	16 3/16"	30	18' 10"	
3118D	18'	17 1/8"	16 3/16"	37	20' 8"	
3120D	20'	17 1/8"	16 3/16"	41	22' 7"	

# ALUMINUM EXTENSION



Box Section Design



Side Mounted Pulley



D Rung



4200D

MODEL	LADDER SIZE	MAX. OPEN LENGTH	BASE SECTION		FLY SECTION		APPROX. WEIGHT LBS	MAX. REACH
			OUTSIDE WIDTH	INSIDE WIDTH	OUTSIDE WIDTH	INSIDE WIDTH		
4216D	16'	13"	16 15/16"	15 3/16"	14 5/8"	12 7/8"	32	15' 11"
4220D	20'	17"	16 15/16"	15 3/16"	14 5/8"	12 7/8"	37	19' 10"
4224D	24'	21"	16 15/16"	15 3/16"	14 5/8"	12 7/8"	44	23' 8"
4228D	28'	25"	16 15/16"	15 3/16"	14 5/8"	12 7/8"	52	27' 7"
4232D	32'	29"	18 6/16"	16 6/16"	15 7/8"	13 7/8"	64	31' 5"
4236D	36'	32"	18 6/16"	16 6/16"	15 7/8"	13 7/8"	70	34' 4"
4240D	40'	35"	18 6/16"	16 6/16"	15 7/8"	13 7/8"	82	37' 4"
4244D	44'	39"	18 6/16"	16 6/16"	15 7/8"	13 7/8"	90	40' 2"



D Rung



Max Lock




Swivel Safety Shoe



3200D

MODEL	LADDER SIZE	MAX. OPEN LENGTH	BASE SECTION		FLY SECTION		APPROX. WEIGHT LBS	MAX. REACH
			OUTSIDE WIDTH	INSIDE WIDTH	OUTSIDE WIDTH	INSIDE WIDTH		
3216D	16'	13"	17 13/16"	15 9/16"	15 3/8"	13 1/8"	29	15' 11"
3220D	20'	17"	17 13/16"	15 9/16"	15 3/8"	13 1/8"	35	19' 10"
3224D	24'	21"	17 13/16"	15 9/16"	15 3/8"	13 1/8"	41	23' 8"
3228D	28'	25"	18 1/8"	15 7/8"	15 11/16"	13 7/16"	53	27' 7"
3232D	32'	29"	18 1/8"	15 7/8"	15 11/16"	13 7/16"	60	31' 5"
3236D	36'	32"	18 1/8"	15 7/8"	15 11/16"	13 7/16"	74	34' 4"
3240D	40'	35"	18 1/8"	15 7/8"	15 11/16"	13 7/16"	82	37' 4"



Aluminum Pulley



Rung Lock



Slip Resistant Shoe



2200

MODEL	LADDER SIZE	MAX. OPEN LENGTH	BASE SECTION		FLY SECTION		APPROX. WEIGHT LBS	MAX. REACH
			OUTSIDE WIDTH	INSIDE WIDTH	OUTSIDE WIDTH	INSIDE WIDTH		
2216	16'	13"	16 6/16"	14 6/16"	15 5/16"	13 5/16"	21	15' 11"
2220	20'	17"	16 6/16"	14 6/16"	15 5/16"	13 5/16"	27	19' 10"
2224	24'	21"	16 6/16"	14 6/16"	15 5/16"	13 5/16"	33	23' 8"
2228	28'	25"	16 6/16"	14 6/16"	15 5/16"	13 5/16"	41	27' 7"
2232	32'	29"	17 1/8"	15 1/8"	16 3/16"	14 5/16"	48	31' 5"
2240	40'	35"	17 1/8"	15 1/8"	16 3/16"	14 5/16"	78	37' 4"




3 in 1 Step



Stairway



Extension




2700	MODEL	STEP SIZE	EXTENSION SIZE	MAX. EXTENSION OPEN LENGTH	APPROX. WEIGHT (LBS)	MAX. REACH
	2706	6'	12'	9'	22	N/A
2707	7'	14'	11'	25	N/A	
2708	8'	16'	13'	27	N/A	



**CROSSXSTEP** |



Top



Lock



Shox/Boot



FXS6900	MODEL	LADDER SIZE	BOTTOM WIDTH (IN)	APPROX. SPREAD (IN)	APPROX. WEIGHT (LBS)	APPROX. CUBES (FT)	SHELFLADDER		STEPLADDER	
							HIGHEST STANDING LEVEL (IN)	MAX. REACH	HIGHEST STANDING LEVEL (IN)	MAX. REACH
	FXS6904	4'	20 1/4"	24	15	4	11"	7' 6"	1' 11"	8' 6"
	FXS6906	6'	23 1/4"	36	21	6.8	2' 10"	9' 5"	3' 9"	10' 4"
	FXS6908	8'	26 1/4"	48	28	10.1	4' 9"	11' 4"	5' 8"	12' 3"
	FXS6910	10'	29 1/4"	60	39	14	6' 8"	13' 3"	7' 7"	14' 2"
	FXS6912	12'	32 3/8"	71	48	18.5	8' 6"	15' 1"	9' 6"	16' 1"



# ACCESSORIES

## POLE STRAP FLY

Holds top of ladder against poles, pipes or corners.

FACTORY	PART #	99061
F01		

## POLE STRAP BASE

Holds top of ladder against poles, pipes or corners.

FACTORY	PART #	PK1171
F02		

## MESSENGER HOOK

Safety catch for ladders on wire or cable strands

FACTORY	PART #	99063
F04		

## NON SLIP STRIP

Additional non-slip resistance for any project.

FACTORY	PART #	99322
F05		

## SHOULDER PAD

Added comfort for ladder transportation.

FACTORY	PART #	99321
F06		

## BASE V RUNG

Allows ladder to lean into poles, pipes and corners.

FACTORY	PART #	99130-B
F07		

## FLY V RUNG

Allows ladder to lean into poles, pipes and corners.

FACTORY	PART #	99130-F
F08		

## GLOVES

Protects ladder rail and work surface from marring.

FACTORY	PART #	99129
F11		

## LEVELOK™

Keeps ladder level on any surface.

FACTORY	PART #	21145
F13		

	6200	6200D	9200D	5600D SINGLE	6100 SINGLE
ACCESSORY #F01 POLE STRAP FLY	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
ACCESSORY #F02 POLE STRAP BASE	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
ACCESSORY #F04 MESSENGER HOOK	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
ACCESSORY #F05 NON SLIP	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
ACCESSORY #F06 SHOULDER PAD	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
ACCESSORY #F07 BASE V RUNG RIDGID	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
ACCESSORY #F08 FLY V RUNG SKINNY	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
ACCESSORY #F11 GLOVES	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
ACCESSORY #F13 LEVELOK™	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>


To order factory-mount accessories, add the 3-digit accessory number and size. EXAMPLE: 6220-F01, 20' Fiberglass Extension Ladder with Pole Strap Fly.

**FEATHERLITE**

**CANADIAN HEAD OFFICE**

100 ENGLHARD DRIVE  
AURORA, ON, L4G 3V2

PHONE ..... 905.727.0031  
TOLL FREE ..... 800-867-5233  
FAX ..... 905-727-7271

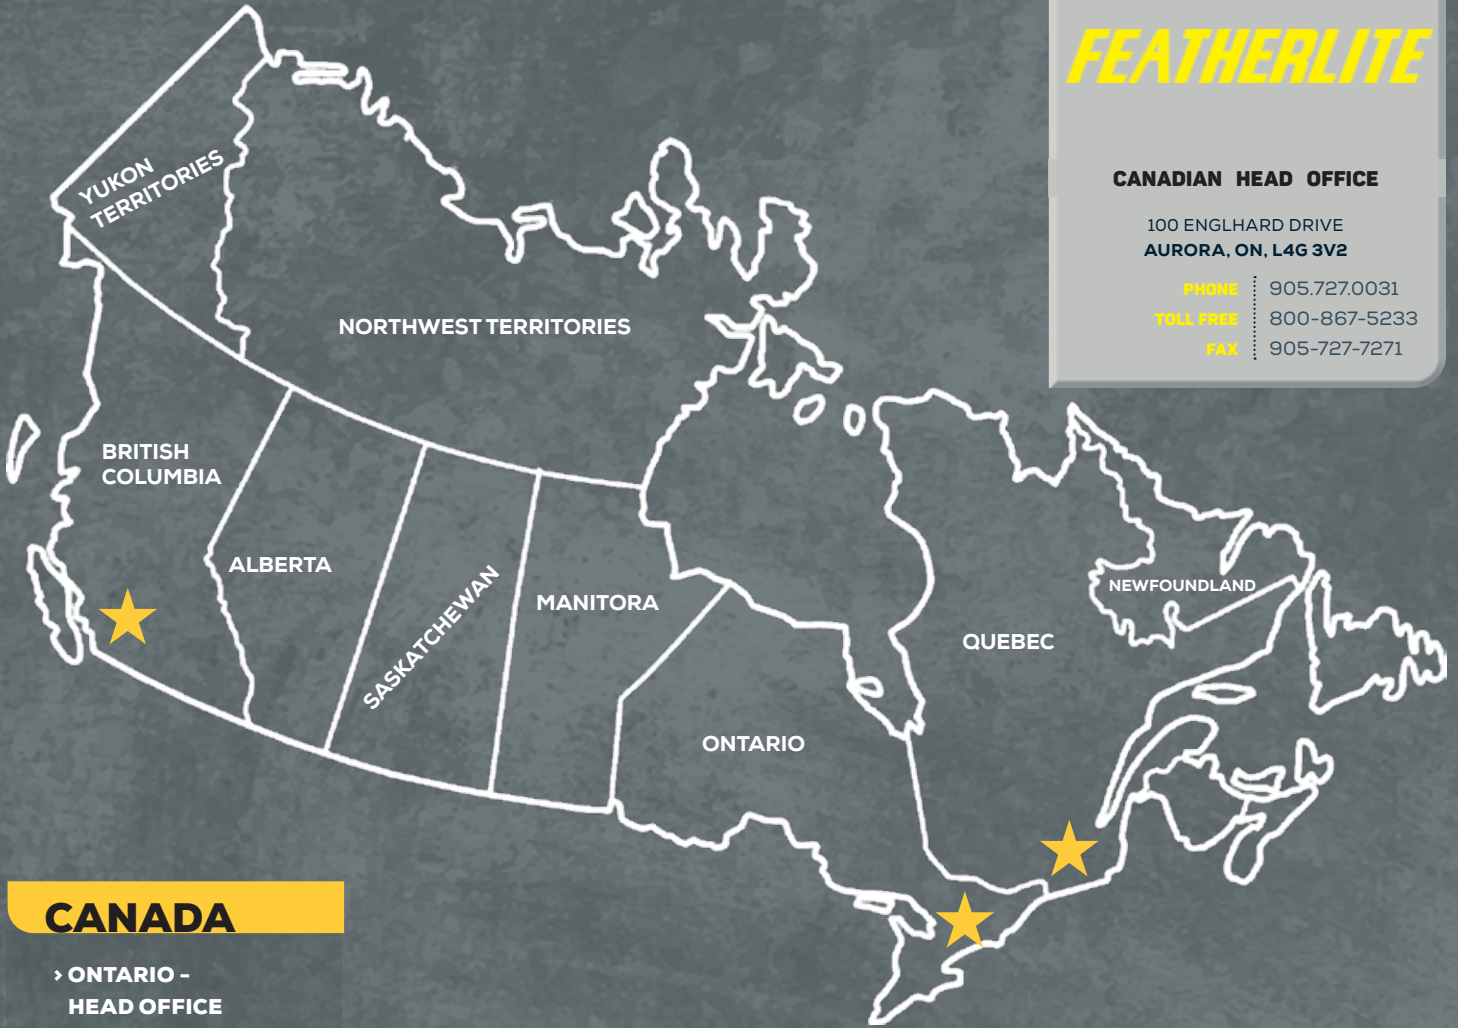

**CANADA**

› **ONTARIO - HEAD OFFICE**

402 Mulock Drive, Unit #2  
Newmarket, ON, L3Y 9B8  
PHONE: (647) 484-0425

› **ONTARIO - WAREHOUSE**

402 Mulock Drive, Unit # 2  
Newmarket, ON  
L3Y 9B9  
phone: (647)484-0425

› **QUEBEC**

2001 Francis Hughes  
Laval, QC H7S 2G2  
PHONE: (450) 668-4610  
FAX: (450) 668-4611

› **BRITISH COLUMBIA**

7205 Brown Street  
Delta, BC V4G 1G5  
PHONE: (604) 940-2972  
FAX: (604) 940-2973

**USA**

**BENSALEM, PA**  
855 Dunks Ferry Road  
Bensalem, PA 19020  
Phone: (215) 638-8904

**GRAND PRAIRIE, TX**  
801 Heinz Way  
Grand Prairie, TX 75051  
Phone: (972) 602-4400

**ONTARIO, CA**  
2050 S. Baker Ave.  
Ontario, CA 91761  
Phone: (909) 941-0623

**LAREDO, TX**  
8705 Killam Industrial Blvd.  
Laredo, Tx, 78045  
Phone: (956) 523-6518

**LOUISVILLE, KY**  
7765 National Turnpike, Unit  
190 Louisville, KY, 40214  
phone: (502) 636-2811

**SALT LAKE CITY, UT**  
760 West Layton Ave.  
Salt Lake City, UT 84104  
Phone: (801) 854-8949

**SEATTLE, WA**  
920 S. Doris Street  
Seattle, WA 98108  
Phone: (206) 762-4888  
Fax: (206) 767-4386

**TUCKER, GA**  
2689A Mountain Industrial Blvd.  
Tucker, GA 30084  
Phone: (770) 491-1515

# **FEATHERLITE**

FULL LINE CATALOG 2021

## **CANADIAN HEAD OFFICE**

100 ENGLHARD DRIVE  
AURORA, ON, L4G 3V2

**PHONE** 905-727-0031

**TOLL FREE** 800-867-5233

**FAX** 905-727-7271